


NOTE:

The flange-to-flange dimension is 1/2" larger than the outside dimension of curb, unless directed otherwise

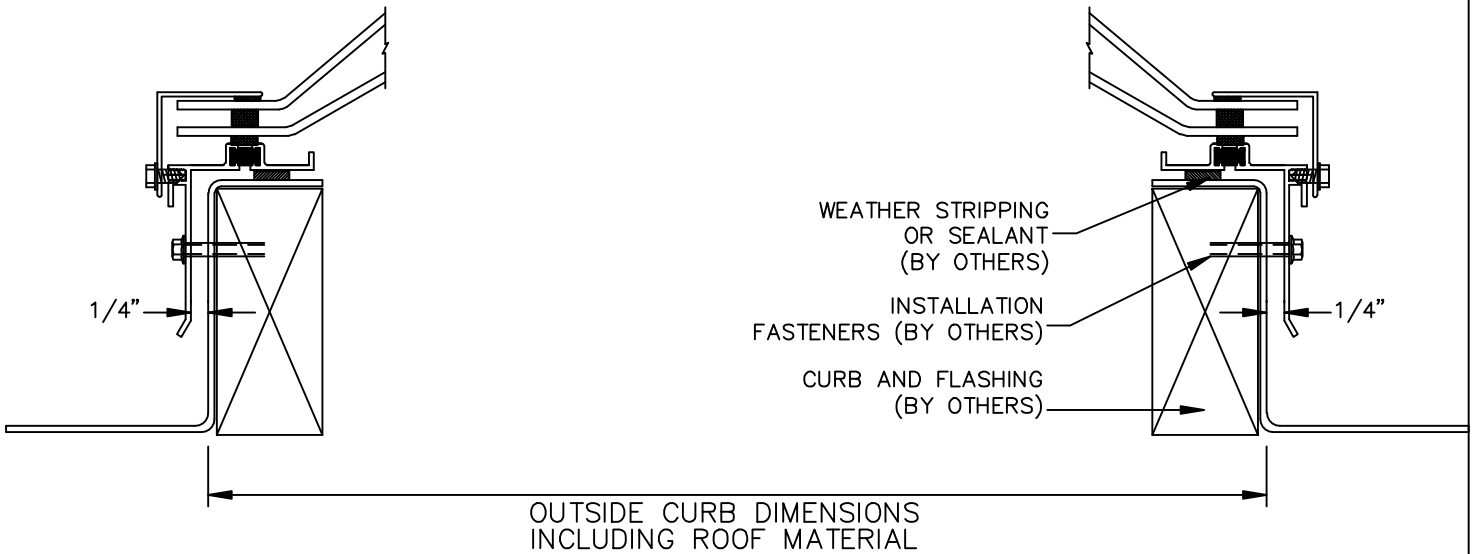

CURB MOUNT-ACRYLIC; THERMALLY BROKEN - SPECIFICATION:

Curb Mount-Acrylic; Thermally Broken, as manufactured by ORCA Manufacturing, Inc., with sealed insulated double acrylic domes (Clear over Clear standard, White or Bronze tints available as an option) in a welded thermally broken extruded aluminum sash. Each unit will have a built-in evaporative condensation gutter. Finish in bronze or mill (white gloss enamel as an option).

CMA-TB					
Model	Dimensions (F/F)	Glazing	Finish	Quantity	Project



TITLE: CURB MOUNT ACRYLIC - THERMALLY BROKEN - DOME

Rev. Date	April 11, 2012	Sheet: 1 OF 1
Drawn By	AP	
Rev. By	CRH	Dwg No. CMA-TB 041112
Engineer:	AP	

ORCA Manufacturing, inc.
P.O. Box 992
Hurlock, MD 21643
PHONE (800) 776-1539
FAX (410)-943-8245
www.starlightskylights.com