


NOTE:
The flange-to-flange dimension is 1/2" larger than the outside dimension of curb, unless directed otherwise

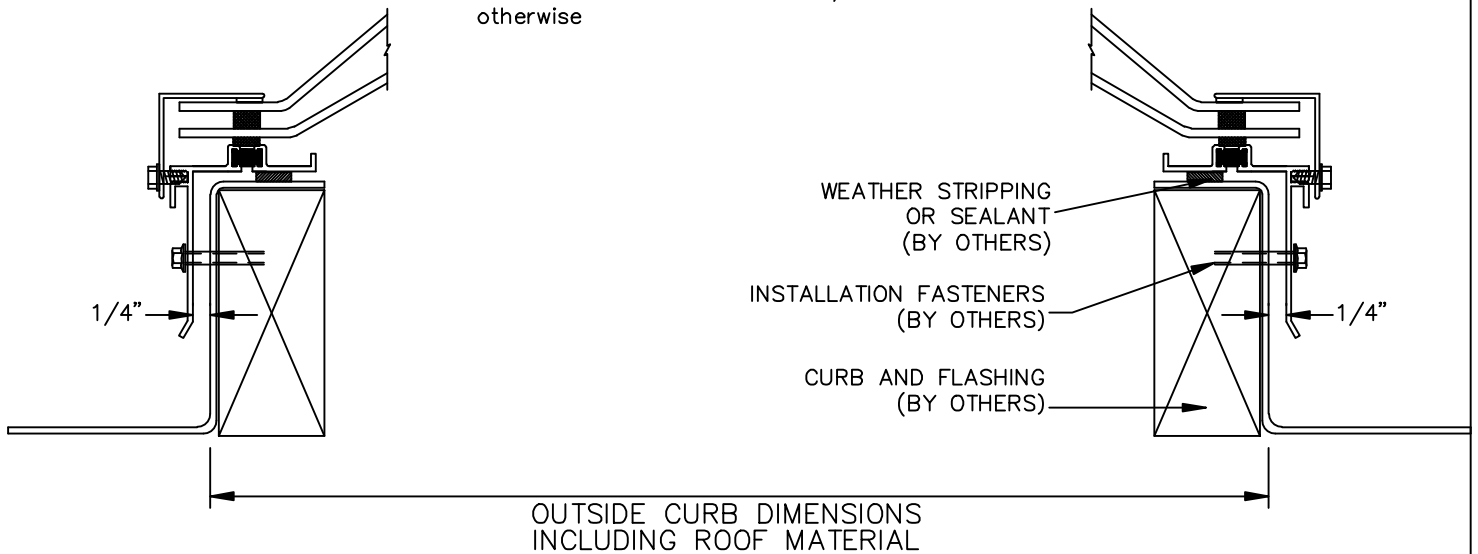

AAMA/WDMA/CSA 101/I.S.2/A440-08
TEST REPORT

CURB MOUNT-POLYCARBONATE; THERMALLY BROKEN - SPECIFICATION:

Curb Mount-Polycarbonate; Thermally Broken, as manufactured by ORCA Manufacturing, Inc., with sealed insulated double polycarbonate domes (Clear over Clear standard, White or Bronze tints available as an option) in a welded thermally broken extruded aluminum sash. Each unit will have a built-in evaporative condensation gutter. Finish in bronze or mill (white gloss enamel as an option).

CMP-TB					
Model	Dimensions (F/F)	Glazing	Finish	Quantity	Project



TITLE: CURB MOUNT POLYCARBONATE THERMALLY BROKEN - DOME

Rev. Date	April 13, 2012	Sheet: 1 OF 1
Drawn By	AP	
Rev. By	CRH	Dwg No. CMP-TB 041312
Engineer:	AP	

ORCA Manufacturing, inc.
P.O. Box 992
Hurlock, MD 21643
PHONE (800) 776-1539
FAX (410)-943-8245
www.starlightskylights.com